

D1000


Fixtures High Pressure Spraying Cleaning Machine




Application:



Oven
Radiator



Reflow Oven Air
Flow Panel



Solder Paste
Stencil



Solder Paste
Squeegee



Reflow Oven
Filter



Wave Solder
Pallet

Suitable To Use On Pallets, M Size Solder Paste Stencil, Plastic, Metal Jig/ Fixtures. The Application Use On The Pallets Cleaning Will Be Most Suitable, Beside Of This, Software Are Adjustable To Ensure Cleaning Result Are Meet With Process Optimization.

Shenzhen KED Optical Electric Technology Co.,Ltd.

Address: 3F Building 1, Huabo High-Tech Industrial Park, No.7
Road, Guangqiao Road, Guangming District, Shenzhen, China
Tel: +86-755-23429199 Fax: +86-755-23429191
E-mail: info@kedtech.com.cn

KED Tech Pte Ltd


Address: 52 Ubi Avenue 3, Frontier #02-38 Singapore 408867
Tel: +6016 4748835 Fax: +65 65475451
E-mail: sales@kedtech.biz

Technical Parameters

Machine Dimension	1480mm(W) x 1780mm(L) x 1440mm(H)
Machine Net Weight	About 600Kg
Product Cleaning Size (Max)	Φ1000mm(L) x 500mm(H)
Rinsing Tank Capacity (Max)	60L
Cleaning Tank Capacity (Max)	80L
Air Supply Requirements	0.45-0.7Mpa
Cleaning Method	High Pressure Spraying From Top/Bottom/Side
Rinsing Method	High Pressure Spraying From Top/Bottom/Side
Drying Method	High Pressure Hot Air Drying
DI Water Incoming Requirements	30-60L/Min 0.4Mpa
DI Water Consumption	200-500L
Air Supply Requirements	>800L/Min >0.55Mpa
Air Supply Consumption	300-600L/Min
Cleaning Pump Power	4Kw
Drying Blower Power	2.2Kw
Cleaning Heater Power	9Kw
Drying Heater Power	6Kw
Resistivity Monitoring Range	0-18MΩ
Cleaning Filter Size	3 Filter Core System (Cotton Filter Core:10"100μm)
Incoming Pipe Dimension	1 Inch
Outgoing Pipe Dimension	1 Inch
Incoming Air Tubing Size	φ12mm
Liquid Heating Temperature Range	Room Temperature To 75°C
Drying Heating Temperature Range	Room Temperature To 99°C
Power Supply Requirements	AC380V 50A 50Hz
Overall Power	25Kw
Exhaust Size	φ112mm
Noise	<83Decible

Details Introduction

D1000 Fixtures High Pressure Spraying Cleaning Machine Are Fully Automatic Operation, The Cleaning Chemical Use Will Be Water Based Cleaning Agent, Whole Machine Operation Are Control By PLC + Touch Panel For Parameters Setting. Insert The Product Into Cleaning Basket, Closed The Cover And Press On Start Button, Machine Will Carry On Cleaning, Rinsing & Drying The Products.

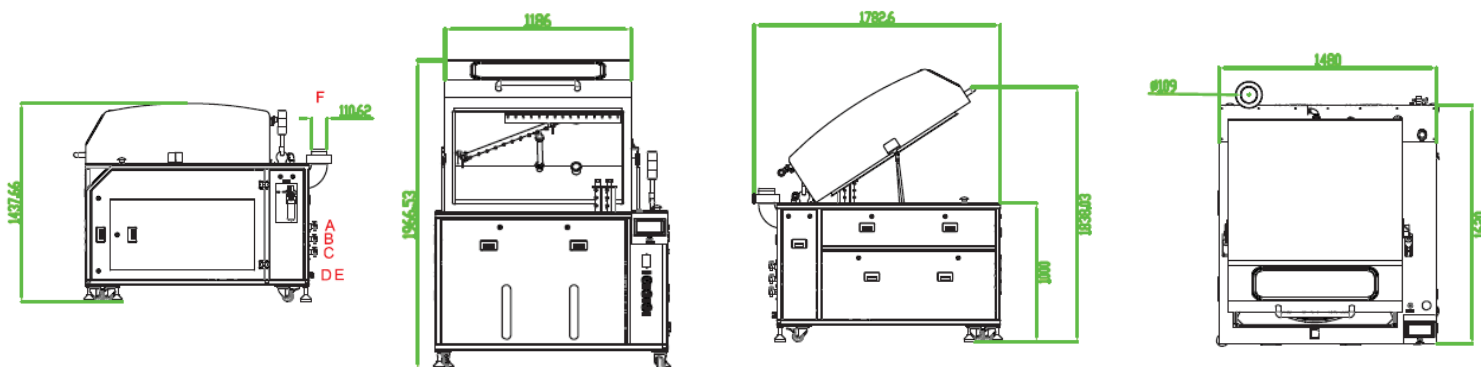

Shenzhen KED Optical Electric Technology Co.,Ltd.

Address: 3F Building 1, Huabo High-Tech Industrial Park, No.7 Road, Guangqiao Road, Guangming District, Shenzhen, China
Tel: +86-755-23429199 Fax: +86-755-23429191
E-mail: info@kedtech.com.cn

KED Tech Pte Ltd

Address: 52 Ubi Avenue 3, Frontier #02-38 Singapore 408867
Tel: +6016 4748835 Fax: +65 65475451
E-mail: sales@kedtech.biz